



RSG  
CONTRACT

EAVE

How do you like to go up in a swing  
up in the air so blue?  
Oh ,I do think it the pleasantest thing  
ever a child can do.

Up in the air and over the wall  
till I can see so wide.  
River and trees and cattle and all  
over the countryside.

Till I look down on the garden green  
down on the roof so brown

Up in the air I go flying again  
Up in the air and down.









15608



15605














# EAVE

**Product Name** : Eave 15600  
**Construction** : Multi-level Loop  
**Material** : 100% Nylon 6  
**Color System** : 100% Solution Dyed  
**Machine Gauge** : 1 / 12 "  
**Pile Height** : 3.5 ~ 4.5 mm  
**Tile Size** : 25 x 100 cm  
**Soil/Stain Protection** : RSG Protection  
**Backing Structure** : EcoGen®

## Generic Tests

<b>Dynamic Loading</b> Pass ISO 2094 Pass AS/NZS 2111.2	<b>Green Carpet(VOC)</b> Pass ISO 10580 Pass ASTM D7706-11
<b>Static Loading</b> Pass ISO 015/3415 Pass AS/NZS 2111.13	<b>Green Carpet (Formaldehyde)</b> Pass NIOSH Method 2016
<b>Thermal Resistance</b> Pass ASTM C518 R	<b>Static Generation</b> Pass AATCC 134

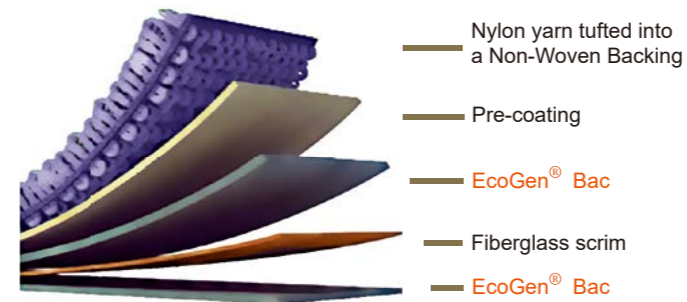

## EcoGen® BAC

A minimum of 35% overall recycled content.

Standard for all RSG Contact Modular product designs. And we only use Hexamoll DINCH as plasticizers.




## Performance Specifications

<b>Stability - Delaminating</b> Pass ISO 2551 Pass AS/NZS 2111.16 Pass ASTM D3936	<b>Colour Fastness - Light</b> Pass AS 2001 Pass ISO 105-B02 Pass AATCC 16E
<b>Stability - Dimensional</b> Pass ISO 2551 Pass ISO/PAS 17984	<b>Colour Fastness - Rubbing and Crocking</b> Pass ISO 105-X12 Pass AS/NZS 2111.19.1 Pass AATCC 165
<b>Stability - Tuft Bind</b> Pass ASTM D1335 Pass ISO 4919 Pass AS/NZS 2111.15	<b>Colour Fastness - Water</b> Pass AS 2001.4.21 Pass ISO 105-E01 Pass AATCC 107
<b>Flammability - Methanamine Pill</b> Pass BS 6307 Pass ISO 6925	<b>Wear - Castor Chair</b> Pass BS-EN 985 Pass ISO 4918
<b>Flammability - Radiant Panel</b> Pass ISO 9239-1 Pass ASTM E648	<b>Wear - Vetterman Drum</b> Pass BS ISO 10361
<b>Flammability - Smoke Density</b> Pass ISO 9239-1 Pass ASTM E662	<b>Sound Absorption</b> Pass ISO 354
<b>Antistatic</b> Pass BS ISO 6356 Pass AATCC 134	<b>Impact Sound</b> Pass ISO 10140-3
	<b>Antimicrobial Treatment</b> Pass ASTM E2471 Pass AATCC 174 Pass AATCC 171

## Hexamoll DINCH

- Ideal solution for non-phthalate plasticizers.
- Especially designed for applications with close human contacts.
- Used extensively for medical, food contact & toys application.

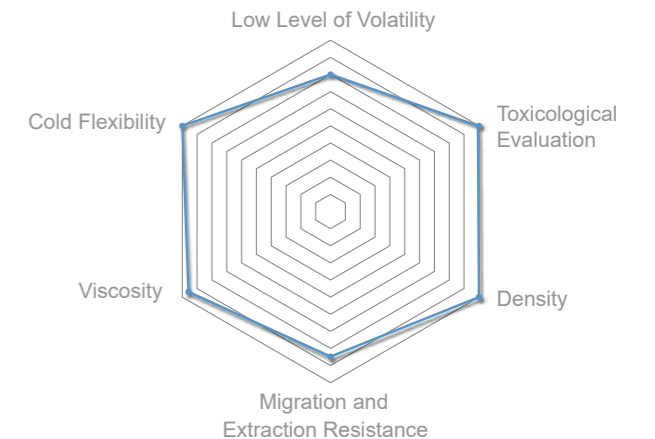

15601 15602 15603 15604 15605 15606 15607 15608